

WHEELLOCK

nd Series NH Horn Appliances

Wall Mount Horn Strobes



		Order Code
15/30/75/110cd		
NS-24MCW-FR	Red	9404
NS-24MCW-FW	White	9405
1575cd		
NS-241575W-FR	Red	7806
NS-241575W-FW	White	7811
1575cd		
NS-121575W-FR	Red	7816
NS-121575W-FW	White	7818

UL Max. Current	15cd	30cd	75cd	110cd	
High (95) dBA	24 VDC	0.074	0.107	0.184	0.244
Low (90) dBA	24 VDC	0.066	0.101	0.177	0.232

UL Max. Current	1575cd	
	24 VDC	12 VDC
High (95) dBA	0.104	0.262
Low (90) dBA	0.096	0.257

Mounting Options: B,D,E,F,G,H,J,N,O,P,R,X

Ceiling Mount Horn Strobes



		Order Code
15/30/75/95cd		
NS-24MCC-FR	Red	3754
NS-24MCC-FW	White	3753
115/177cd		
NS-24MCCH-FR	Red	3756
NS-24MCCH-FW	White	3755

UL Max. Current	15cd	30cd	75cd	95cd	
High (95) dBA	24 VDC	0.082	0.124	0.209	0.275
Low (90) dBA	24 VDC	0.071	0.114	0.201	0.261

UL Max. Current	115cd	177cd
High (95) dBA	0.350	0.477
Low (90) dBA	0.306	0.429

Mounting Options: D,E

Wall or Ceiling Mount Horns



		Order Code
Square		
NH-12/24-R	Red	7449
NH-12/24-W	White	7500
Round		
NH-12/24R-R	Red	3752
NH-12/24R-W	White	3751

UL Max. Current	Audible	
	24 VDC	12 VDC
High (95) dBA	0.044	0.021
Low (90) dBA	0.018	0.012

Mounting Options: B,D,E,F,G,H,J,N,O,P,R,X

Ideal for 2 wire applications with 2 selectable dBA settings (90 and 95) and wall or ceiling mounting.

Available features and options:

Color: Red or White

Mounting: Wall or Ceiling

Multi-Candela or High Intensity

Round or Square


Replaceable Grills

Standard Backboxes


Strobe/horn Synchronization

Approvals: UL, ULC, FM, CSFM, MEA, BFP

Series NS/NH

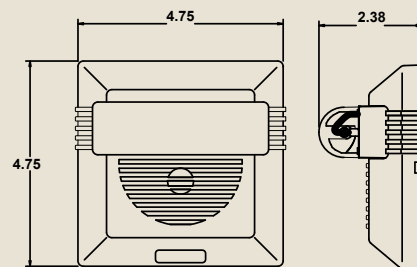

Series NS Round

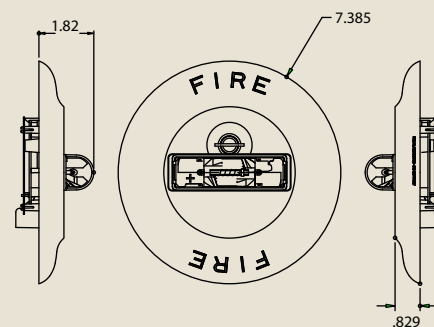

Please reference the back of this catalog for more information on mounting options.

Series NS and NH ceiling mount appliances will be available July 2006.