



Conventional Zone Monitor Unit - 1 Zone

KAL410


Allows the connection of one conventional zone to the analogue fire system loop. This zone is constantly monitored. Up to 20 conventional devices may be connected to this zone.

Specifications

| | |
|--------------------------------|-----------------------|
| Supply voltage | 22-38 VDC |
| Current consumption | |
| Quiescent @ 24 V | 90 A |
| Quiescent @ 35 V | 105 A |
| Alarm | < 3 mA |
| Aux. supply (24 VDC) quiescent | 200 A + equip |
| Aux. supply (24 VDC) alarm | < 85 mA |
| End-of-line resistor | 4.7 kohm |
| Relay contact rating | NA |
| Environmental | |
| Storage temperature | -10 °C to +50°C |
| Operating temperature | -10 °C to +70°C |
| Relative humidity | 95 % (non condensing) |
| Dimensions (L x W x H) | 117 x 80 x 44 mm |

Ordering Information

KAL410 Conventional Zone Monitor Unit - 1 Zone

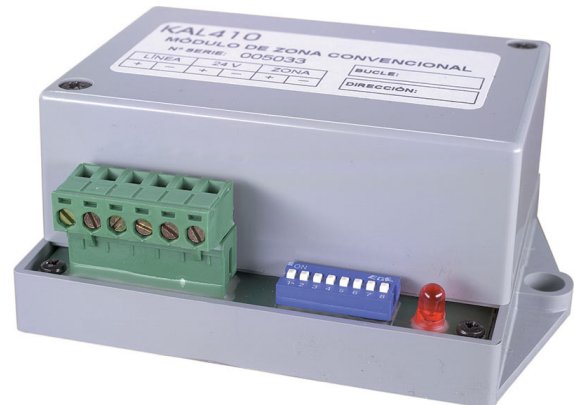

- Easy numeric addressing
- Continuous supervision of the conventional zones
- Surface mount
- Local alarm indication
- Externally powered
- Aesthetically pleasing
- Part of family of I/O modules consisting of:
 - Conventional Zone Monitors
 - Digital Input Modules
 - Extinguishing Control Modules
 - Isolator Modules
 - Manual Call Points
 - Output Units
 - Retention Units
 - Supervised Output Units for sounder control

Distribuição: Segurança Industrial Equipamentos
 Fone/Fax: (41) 4063-9687
 cml@segind.com.br - segind@hotmail.com
 www.segind.com.br